



Yuasa Technisches Datenblatt

Yuasa YBX1027 - YBX1000 CaCa Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung	12V
Kapazität 20 Std (vorgegeben)	56Ah
Kaltstartstrom (A) EN1	510A

Abmessungen

Länge	243mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Durchschnittliches Gewicht	15kg
inkl. Säure	
Säurevolumen	3.7 Liter



Gehäuseeigenschaften

Gehäusotyp	L2 DIN
Batteriehälter	B13/B14
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Deckeltyp	Zentralentgasung


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Adskiller	PE
Empfohlener Ladestrom	5A
Performance Marking	W3-C2-V2-E1

Anschlusspol Typ

T1


Standard DIN Post

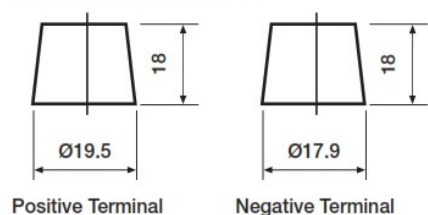

Positive Terminal


Negative Terminal

Zellenanordnung

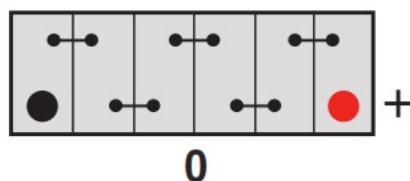

Batteriehälter

B3/B4 (B3 with Hold-Down adaptor)

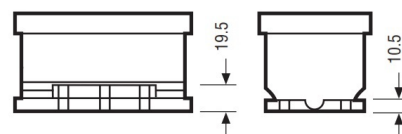

Datenblatt erstellt am 16/09/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX1027 - YBX1000 CaCa Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	56Ah
Cold Cranking Amps (EN1)	510A

Dimensions

Length	243mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	15kg
Acid Volume	3.7 litres



Container Features

Case Type	L2 DIN
Hold Down	B13/B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	Central Venting


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	5A
Performance Marking	W3-C2-V2-E1


Terminal Type

T1

Standard DIN Post

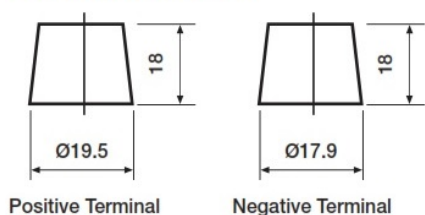


Cell Assembly Layout

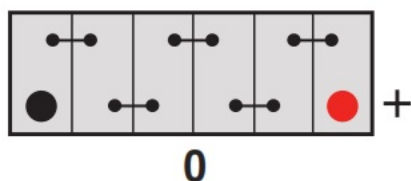

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

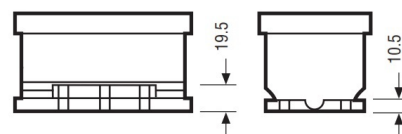

Data Sheet generated on 16/09/2024 - E&OE