



Yuasa Technisches Datenblatt

Yuasa YBX3086 - YBX3000 SMF Batterien

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 76Ah
Kaltstartstrom (A) EN1 680A

Abmessungen

Länge 278mm
Breite 175mm
Höhe 190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 19kg



Gehäuseeigenschaften

Gehäusotyp L3 DIN
Zellenanordnung 1
Batteriehälter B3
Ladezustandsanzeige ✓
Tragegriffe ✓
Entgasung ✓
Deckeltyp SMF doppelwandige Deckelkonstruktion


Technologie

Flammschutz ✓
Technologie Ca/Ca
Adskiller PE
VDA Überschlagentest ✓
Empfohlener Ladestrom 4A
Performance Marking W3-C2-V2-E1


Anschlusspol Typ

T1

Standard DIN Post




Positive Terminal




Negative Terminal

Zellenanordnung

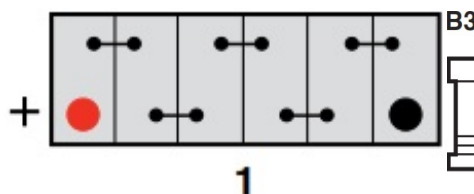

Batteriehälter

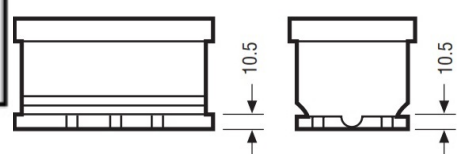

Datenblatt erstellt am 16/09/2024 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3086 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	76Ah
Cold Cranking Amps (EN1)	680A

Dimensions

Length	278mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	19kg
-----------------------	------



Container Features

Case Type	L3 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post

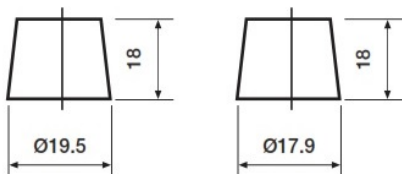


Positive Terminal

Negative Terminal

Cell Assembly Layout

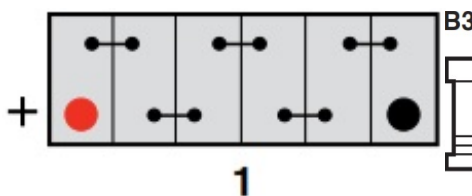

Battery Hold-down

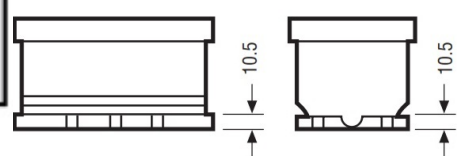

Data Sheet generated on 16/09/2024 - E&OE

