



Yuasa Technisches Datenblatt

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batterien

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Leistung

Spannung 12V
Kapazität 20 Std (vorgegeben) 80Ah
Kaltstartstrom (A) EN1 800A

Abmessungen

Länge 317mm
Breite 175mm
Höhe 190mm

Maße und Gewichte

Durchschnittliches Gewicht inkl. Säure 23.2kg



Gehäuseeigenschaften

Gehäusotyp L4 DIN AGM
Batteriehälter B3
Tragegriffe ✓
Entgasung ✓
Semi Traktionseigenschaften ✓
Deckeltyp VRLA


Technologie

Flammschutz ✓
Technologie Ca/Ca VRLA
Adskiller AGMSORTIMENT
VDA Überschlagentest ✓
Empfohlener Ladestrom 5A
Performance Marking W5-C2-V3-M3

Anschlusspol Typ

T1


Standard DIN Post

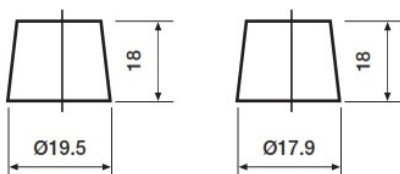

Positive Terminal


Negative Terminal

Zellenanordnung

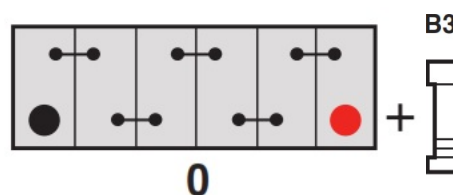

0

Batteriehälter

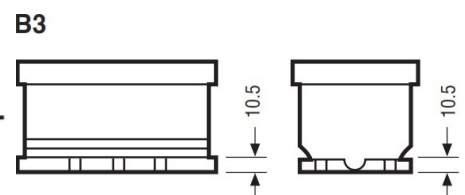

Datenblatt erstellt am 29/04/2025 - E&EO



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX9115 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	80Ah
Cold Cranking Amps (EN1)	800A

Dimensions

Length	317mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	23.2kg
-----------------------	--------



Container Features

Case Type	L4 DIN AGM
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	5A
Performance Marking	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

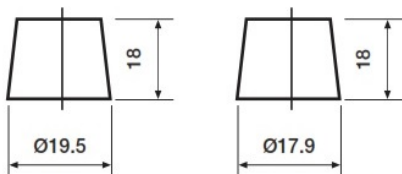


Positive Terminal

Negative Terminal

Cell Assembly Layout

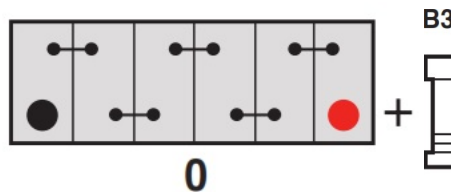

Battery Hold-down

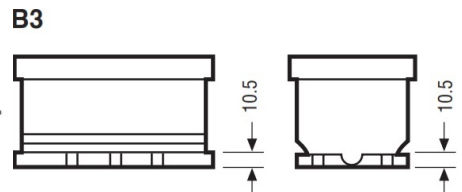

Data Sheet generated on 29/04/2025 - E&OE

