

Qty.	Description
------	-------------

1	Unilift CC9 - A1
---	-------------------------



Note! Product picture may differ from actual product

Product No.: On request

Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level.

The pumps are designed for pumping rainwater and grey wastewater, e.g. from

- washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level
- cellars or buildings prone to flooding
- draining wells
- wells for surface water with inlets from roof gutters, pits, tunnels, etc.
- swimming pools, ponds or fountains.

The pumps are suitable for both stationary and portable use.



They are for automatic operation.

The pumps allow free passage of particles up to ø10 mm.






The motor incorporates automatic overload protection cutting out the motor in case of overload.

When cooled to normal temperature, the motor restarts automatically.



On request Unilift CC9 - A1 50 Hz

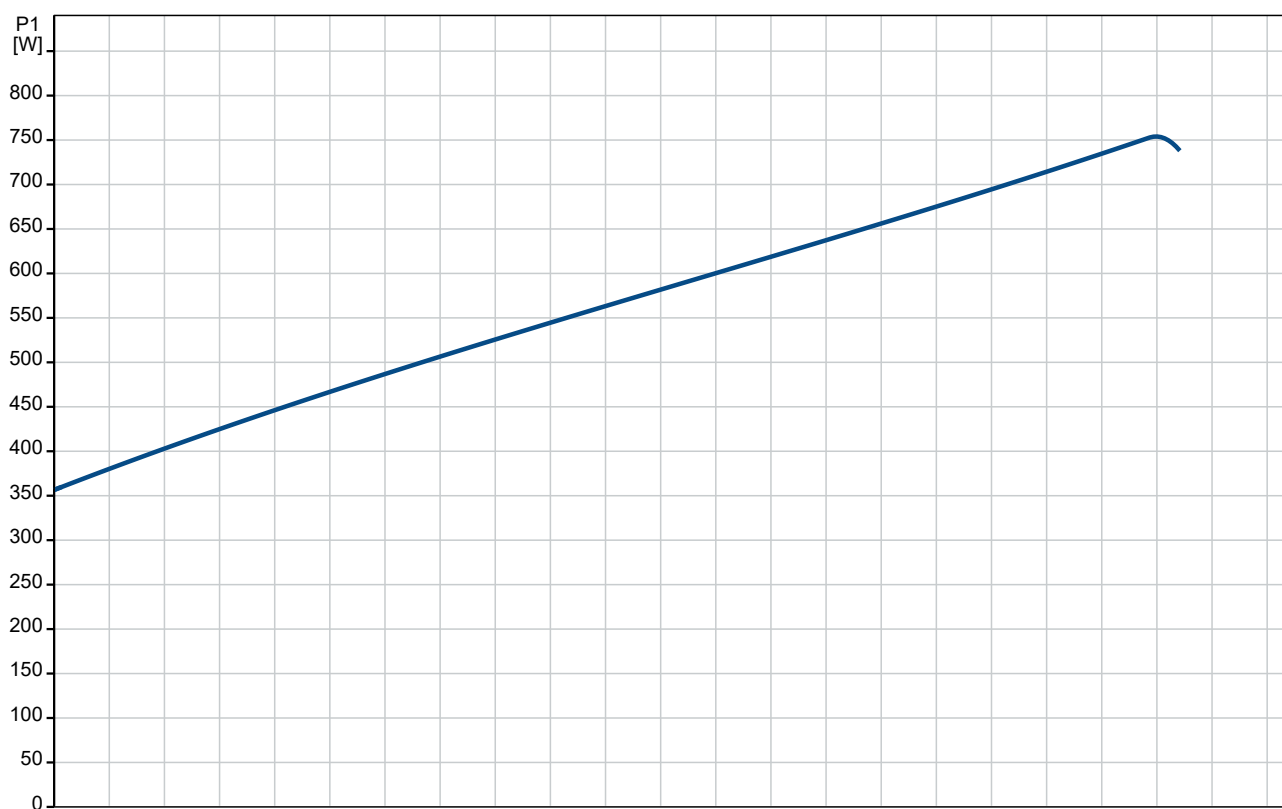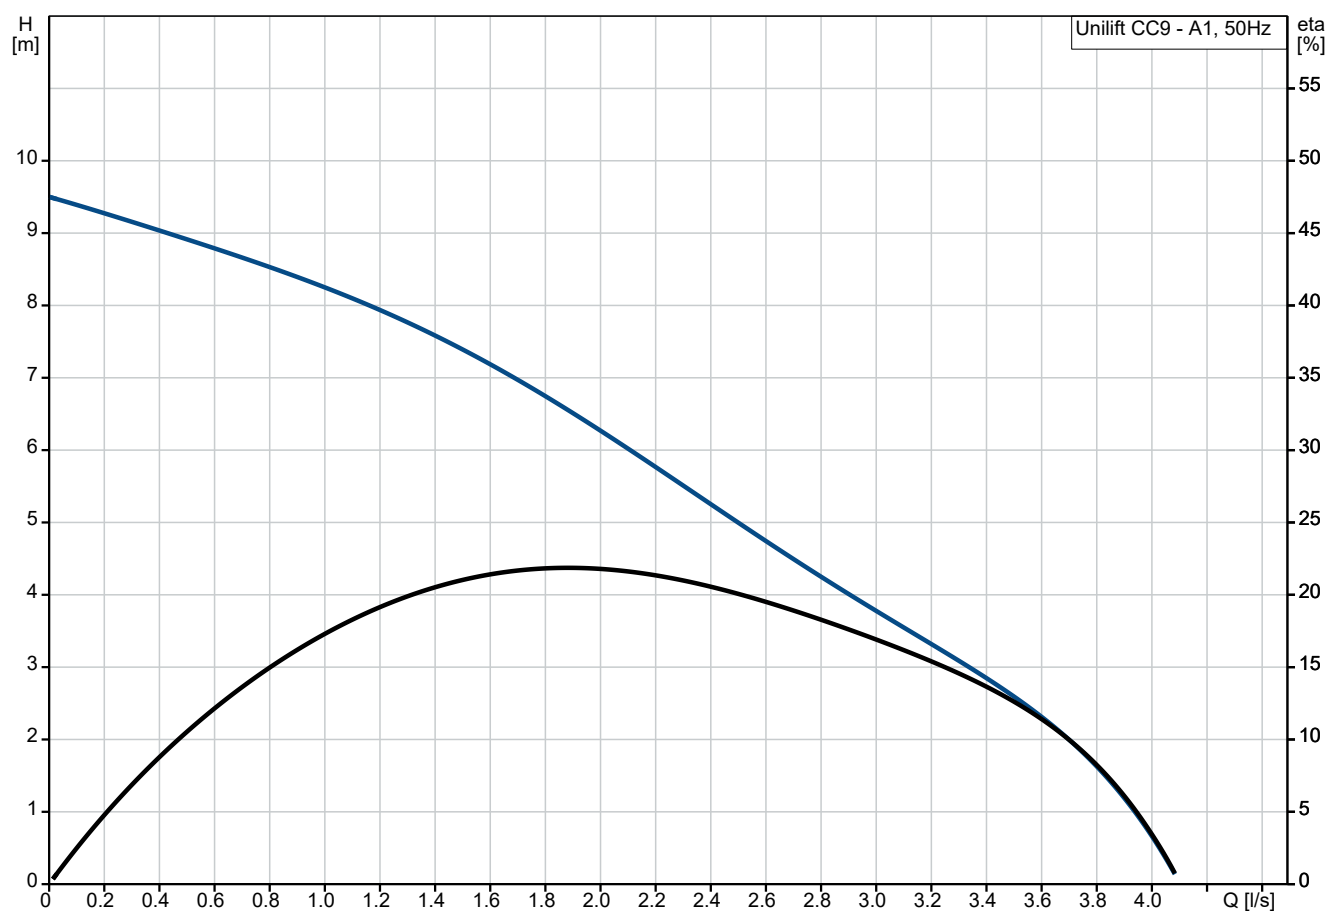

Description	Value
General information:	
Product name:	Unilift CC9 - A1
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	1.88 l/s
Maximum flow:	3.89 l/s
Rated head:	6.56 m
Maximum head:	9 m
Max. Particle:	10 mm
Approvals:	CE, LGA, VDE, UKCA, SEPRO
Materials:	
Pump housing:	Polypropylene
Pump housing:	PP - GF15
Impeller:	Composite
Impeller:	PP 20 GF
Motor:	Stainless steel
Motor:	EN 1.4301
Motor:	AISI 304
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of connection:	R
Size of connection:	1 1/4 inch
Maximum installation depth:	7 m
Liquid:	
Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	780 W
P2:	465 W
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	3.5 A
Rated speed:	2850 rpm
Capacitor size - run:	8 µF/450 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Built-in motor protection:	YES
Length of power cable:	10 m
Type of cable plug:	SCHUKO
Controls:	
Level switch:	float switch
Others:	
Net weight:	6.79 kg
Gross weight:	7.55 kg
Shipping volume:	0.017 m³
Danish VVS No.:	391280391
Swedish RSK No.:	5885926
Norwegian NRF no.:	9045642
Country of origin:	HU
Custom tariff no.:	84137021
Environmental approvals:	WEEE

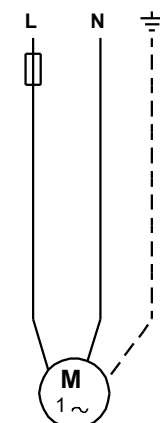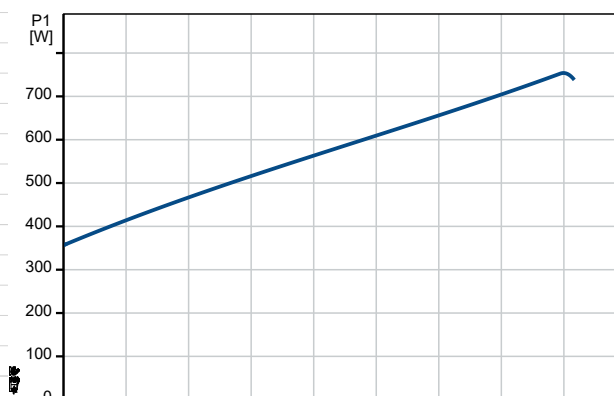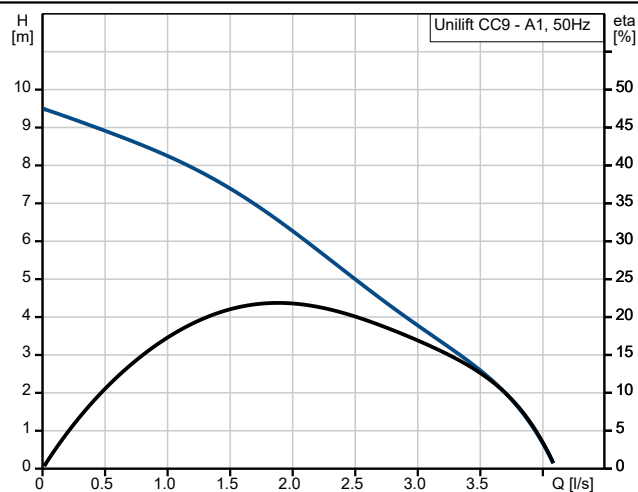

On request Unilift CC9 - A1 50 Hz

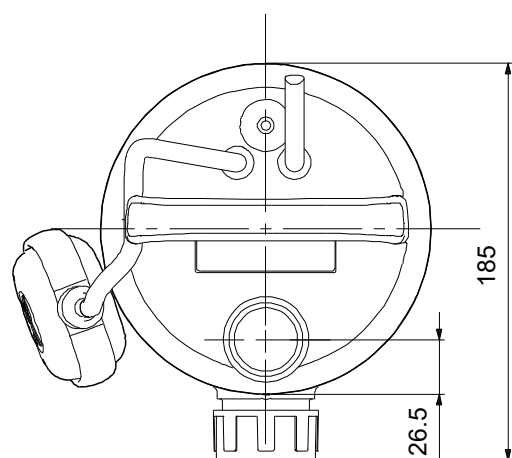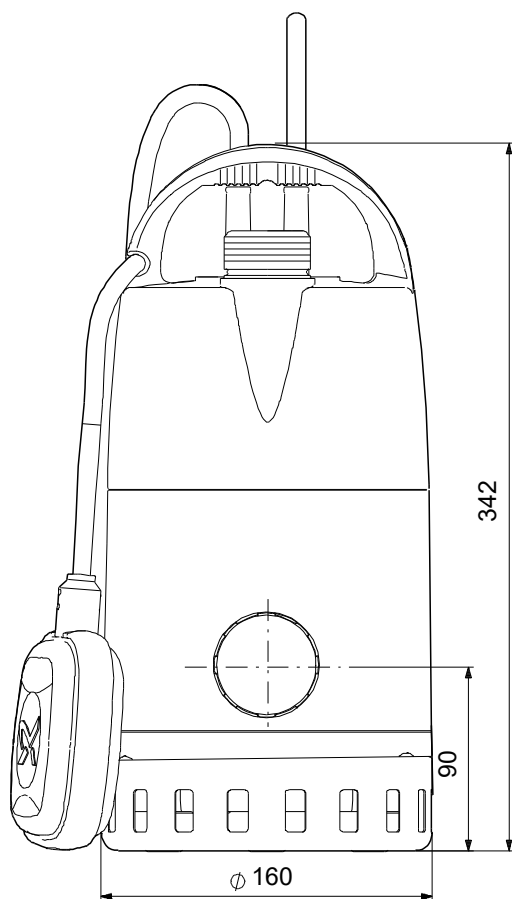

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Spare parts Unilift CC9 - A1, Product No. On request
Produced After 0540 (production year and week number)

Pos	Description	Annotation	Classification Data	Part no.	Qty.	Unit
-	Bulk, Capacitor			96578977	1	pcs
48b	Cable				20	pcs
161	Capacitor				10	pcs
-	Bulk, Discharge connection			96578979	1	pcs
149b	Discharge				10	pcs
-	Bulk, Handle cover			96622011	1	pcs
190	Cover				10	pcs
-	Bulk, Rubber flap valve			96578978	1	pcs
149	Valve flap	Designation: RUBBER			10	pcs
-	Kit, Bottom part			97530921	1	pcs
37a	O-ring				1	pcs
50	Bottom				1	pcs
-	Kit, Cable	Length (M): 10		96578972	1	pcs
48b	Cable				3	pcs
48a	O-ring	Diameter: 88,27			1	pcs
		Material type: NBR				
		Thickness: 2,34				
181	Cable				1	pcs
250a	Cable relief				1	pcs
250	Cable entry				1	pcs
-	Kit, Discharge connection			97825319	1	pcs
130a	Elbow				1	pcs
149b	Discharge				1	pcs
149a	O-ring	Diameter: 37,77			1	pcs
		Material type: NBR				
		Thickness: 2,62				
-	Kit, Float switch			96578970	1	pcs
48b	Cable				4	pcs
48a	O-ring	Diameter: 88,27			1	pcs
		Material type: NBR				
		Thickness: 2,34				
182	Float switch				1	pcs
250a	Cable relief				1	pcs
250	Cable entry				1	pcs
-	Kit, Impeller			96578969	1	pcs
48a	O-ring	Diameter: 88,27			1	pcs
		Material type: NBR				
		Thickness: 2,34				
49c	V-ring				1	pcs
49	Impeller				1	pcs
66	Washer				1	pcs
67	Lock nut				1	pcs
-	Kit, Motor			96578975	1	pcs
48b	Cable				3	pcs
48a	O-ring	Diameter: 88,27			1	pcs
		Material type: NBR				
		Thickness: 2,34				
48	Motor				1	pcs
-	Kit, O-rings			98561387	1	pcs
37a	O-ring				2	pcs
48a	O-ring	Diameter: 88,27			1	pcs
		Material type: NBR				
		Thickness: 2,34				



Company name:

Created by:

Phone:

Date: 29/11/2023

Pos	Description	Annotation	Classification Data	Part no.	Qty.	Unit
149a	O-ring		Diameter: 37,77		1	pcs
			Material type: NBR			
			Thickness: 2,62			
-	Kit, Valve flap rubber			97825322	1	pcs
149a	O-ring		Diameter: 37,77		1	pcs
			Material type: NBR			
			Thickness: 2,62			
149	Valve flap		Designation: RUBBER		1	pcs
-	Spare, Strainer			96578990	1	pcs
84	Strainer				1	pcs