

Qty.	Description
------	-------------

1	Unilift CC5 - AG1
---	--------------------------



Note! Product picture may differ from actual product

Product No.: On request

Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level.

The pumps are designed for pumping rainwater and grey wastewater, e.g. from

- washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level
- cellars or buildings prone to flooding
- draining wells
- wells for surface water with inlets from roof gutters, pits, tunnels, etc.
- swimming pools, ponds or fountains.

The pumps are suitable for both stationary and portable use.



They are for automatic operation equipped with a guided float switch on a lever arm for narrow tanks and pump sumps.

The pumps allow free passage of particles up to Ø10 mm.





The motor incorporates automatic overload protection cutting out the motor in case of overload.

When cooled to normal temperature, the motor restarts automatically.


On request Unilift CC5 - AG1 50 Hz

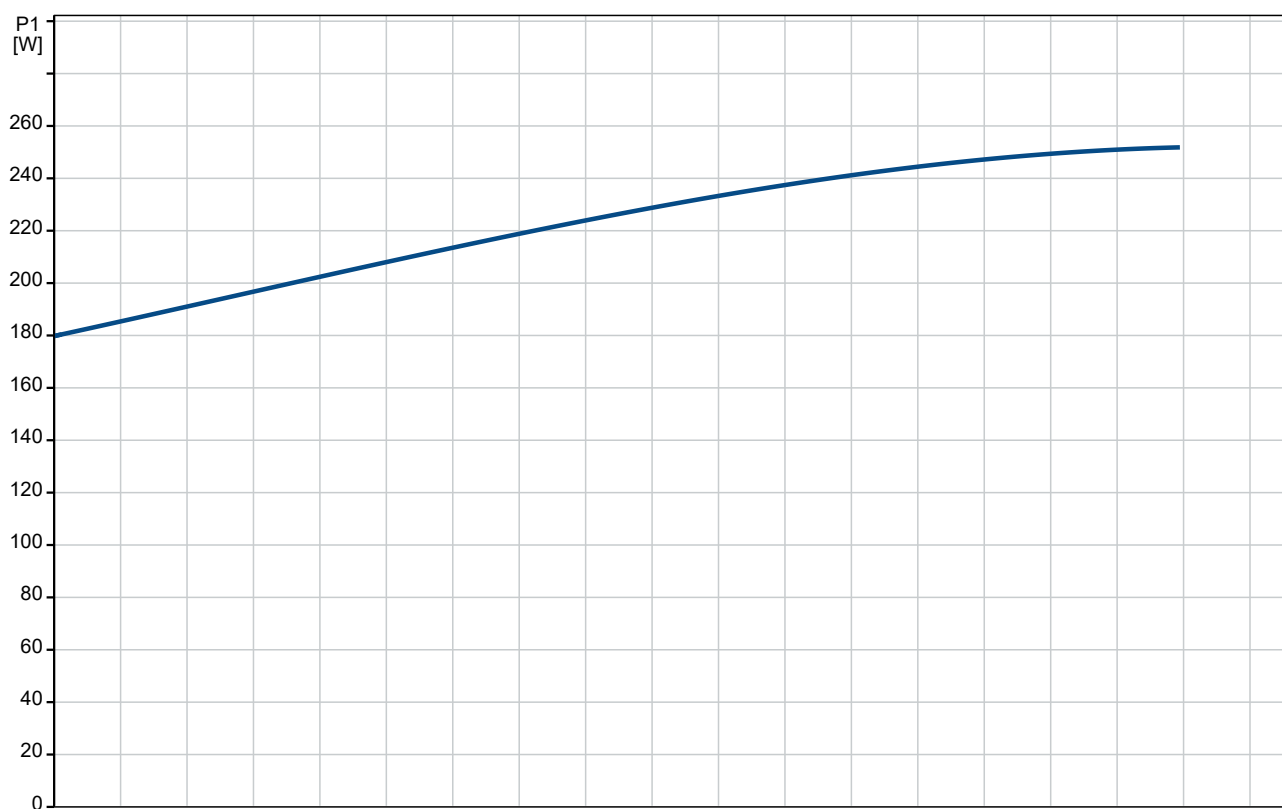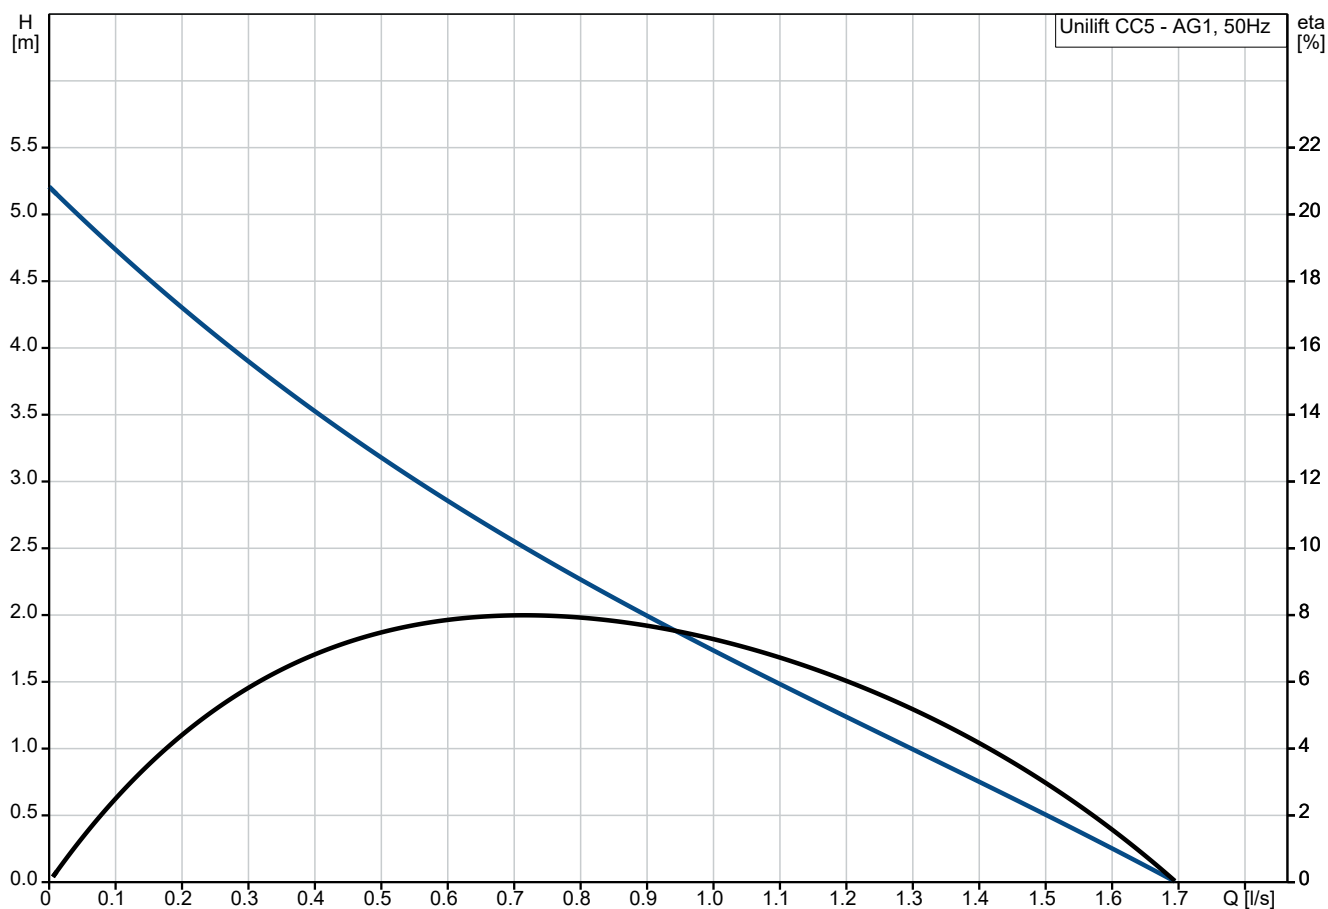

Description	Value
General information:	
Product name:	Unilift CC5 - AG1
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	0.711 l/s
Maximum flow:	1.67 l/s
Rated head:	2.52 m
Maximum head:	5 m
Max. Particle:	10 mm
Approvals:	CE, LGA, VDE, UKCA, SEPRO
Materials:	
Pump housing:	Polypropylene
Pump housing:	PP - GF15
Impeller:	Composite
Impeller:	PP 20 GF
Motor:	Stainless steel
Motor:	EN 1.4301
Motor:	AISI 304
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Type of connection:	R
Size of connection:	1 1/4 inch
Maximum installation depth:	2 m
Liquid:	
Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m³
Electrical data:	
Power input P1:	250 W
P2:	108 W
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	0.98 A
Rated speed:	2850 rpm
Capacitor size - run:	4 µF/450 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Built-in motor protection:	YES
Length of power cable:	5 m
Type of cable plug:	SCHUKO
Controls:	
Level switch:	float switch
Others:	
Net weight:	4.66 kg
Gross weight:	5.42 kg
Shipping volume:	0.021 m³
Danish VVS No.:	391280352
Swedish RSK No.:	5885999
Finnish LVI No.:	4822526
Country of origin:	HU
Custom tariff no.:	84137021
Environmental approvals:	WEEE

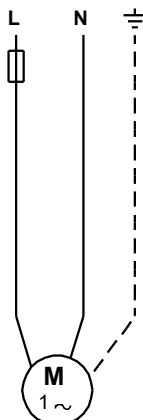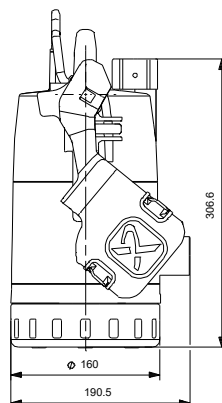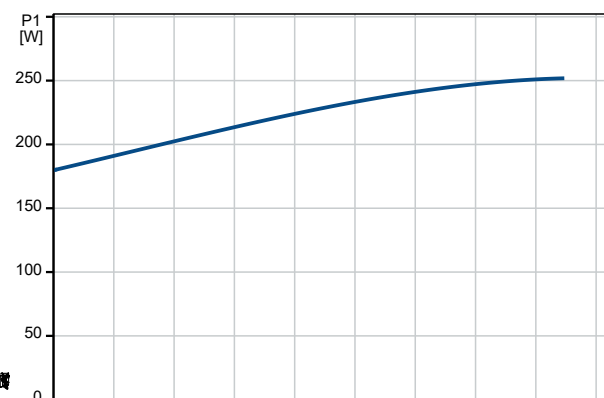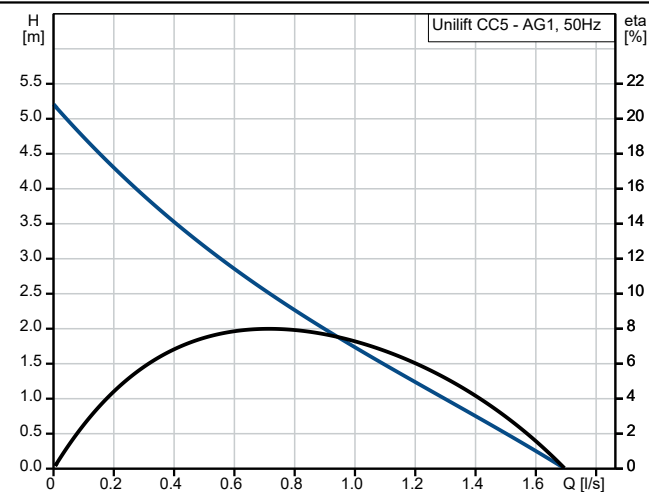

On request Unilift CC5 - AG1 50 Hz

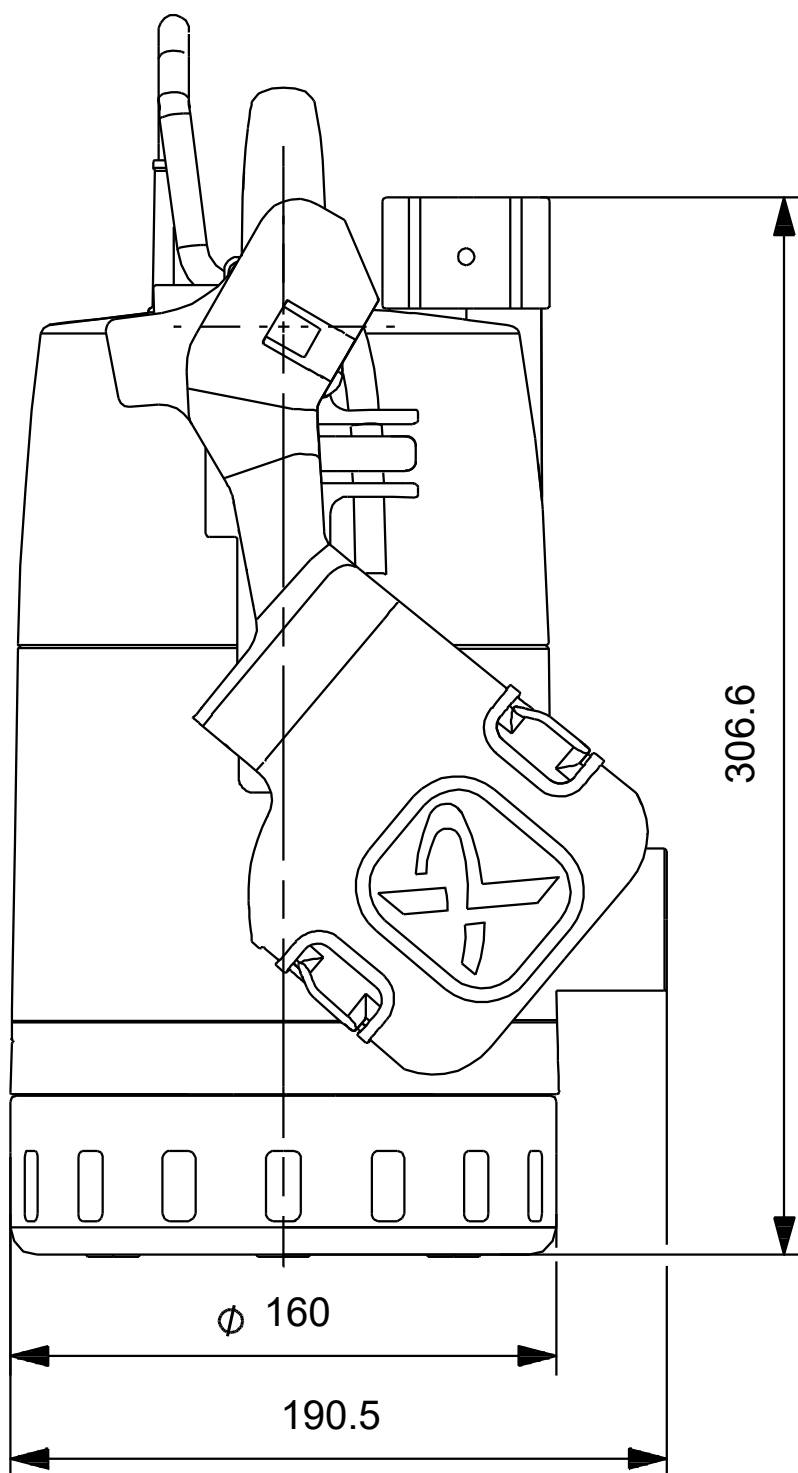

Note! All units are in [mm] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.

